

Chyby:

INPA - Loader: MS 43.0 Version 1.16

Stowacki Stowacki (QWERTY)

Print error memory

JobStatus: OKAY
Variant: MS4300S0

RESULT: 6 errors in error memory !

228 lambda control tolerance Bank 2

Error frequency : 88
Logistic counter: 40

N 32	2752.00	rpn
MAF	201.54	mg/stk
TCO	94.50	Grad C
LAH_MU_2	5.86	%
aufgetreten vor (rel. B2)	46.20	h

Deviation rich

Error to relevant
Error debounce
Error currently not available
sporadic Error

Errorcode: E4 B1 58 28 56 25 BE 8F 8B 02

227 lambda control tolerance Bank 1

Error frequency : 66
Logistic counter: 40

RUNNING

Error memory

F1 F2 F3 F4 F5 F6 F7 F8 F9 F10

Read Clear Shadow Quick adaption Print Back

INPA - Loader: MS 43.0 Version 1.16

Stowacki Stowacki (QWERTY)

Print error memory

Error to relevant
Error debounce
Error currently not available
sporadic Error

Errorcode: E4 B1 58 28 56 25 BE 8F 8B 02

227 lambda control tolerance Bank 1

Error frequency : 66
Logistic counter: 40

N 32	2848.00	rpn
MAF	108.94	mg/stk
TCO	93.75	Grad C
LAH_MU_1	11.71	%
aufgetreten vor (rel. B2)	46.20	h

Deviation rich

Error to relevant
Error debounce
Error currently not available
sporadic Error

Errorcode: E3 B1 42 28 59 14 BD 9E 8B 02

203 Lambda regulating limit Bank2




Error frequency : 3

RUNNING

Error memory

F1 F2 F3 F4 F5 F6 F7 F8 F9 F10

Read Clear Shadow Quick adaption Print Back

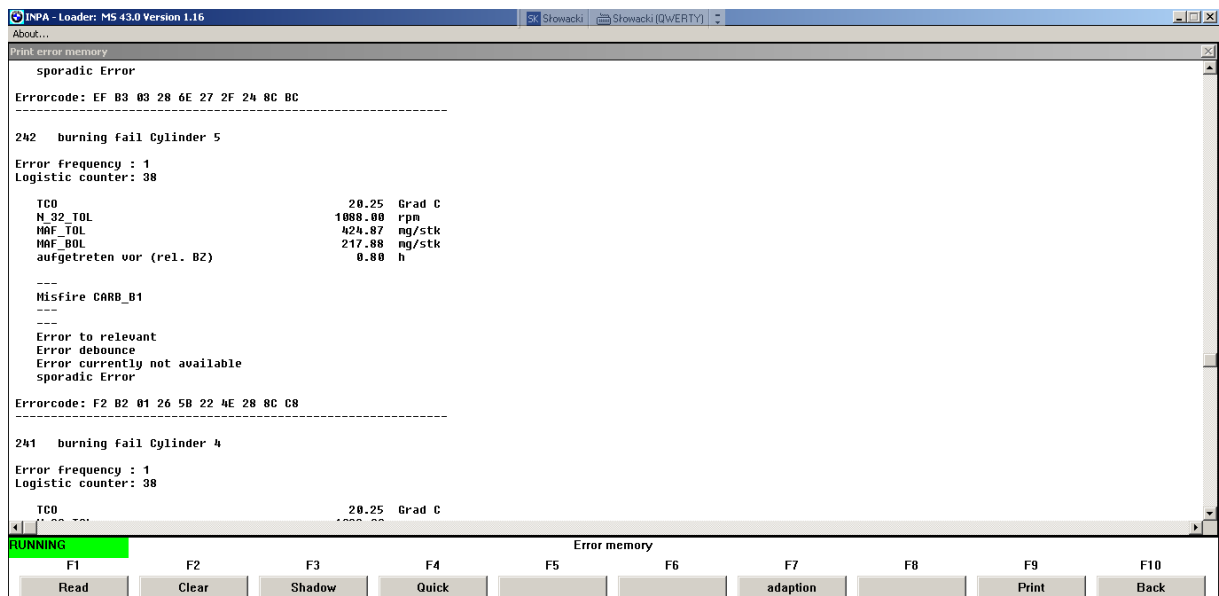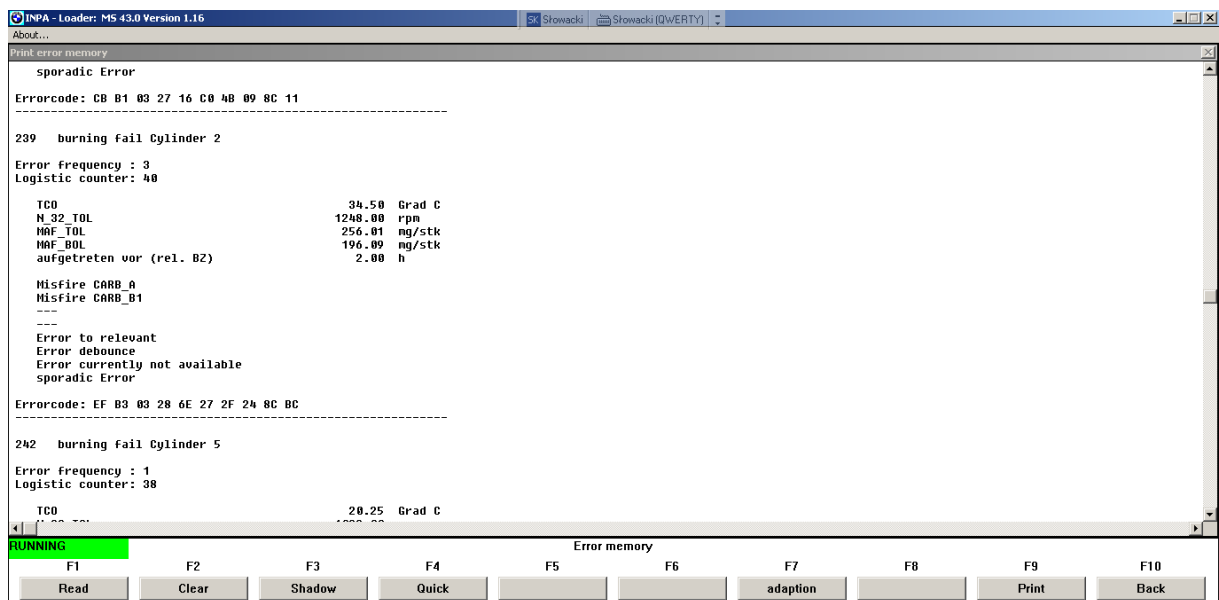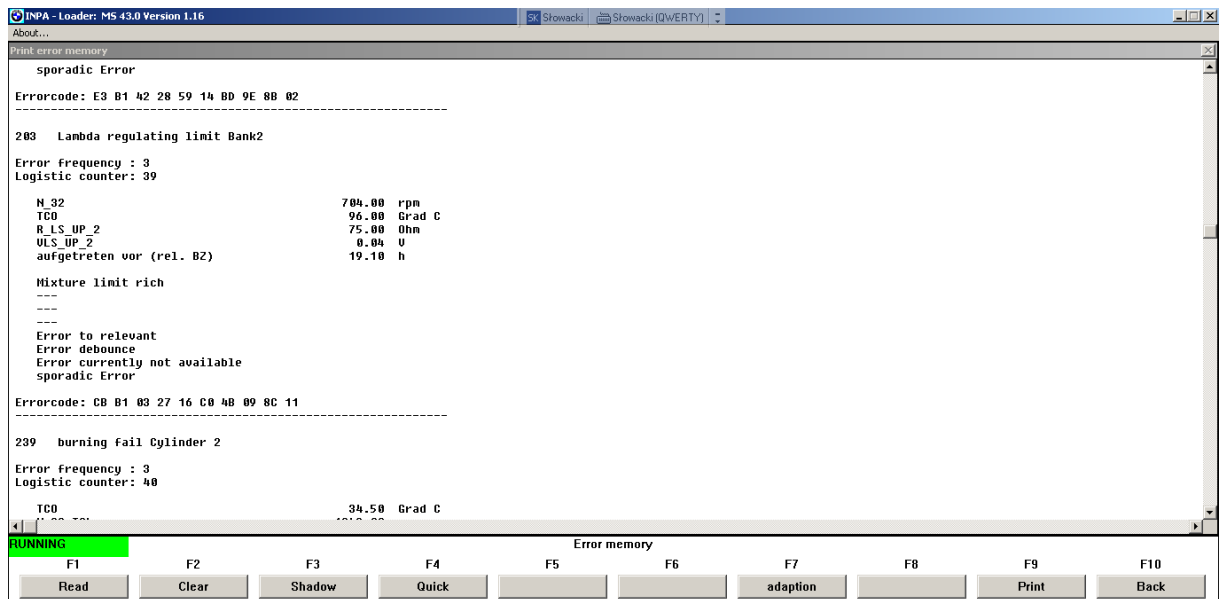

INPA - Loader: MS 43.0 Version 1.16

Print error memory

```

Error to relevant
Error debounce
Error currently not available
Sporadic Error

Errorcode: F2 B2 01 26 50 22 4E 20 8C C8
-----

241 burning fail Cylinder 4

Error Frequency : 1
Logistic counter: 38

TC0                20.25 Grad C
N_32_TOL           1088.00 rpa
MAP_TOL            424.87 mg/stk
MAP_BOL            217.88 mg/stk
aufgetreten vor (rel. BZ) 0.80 h

---
Misfire CARB_B1
---

Error to relevant
Error debounce
Error currently not available
Sporadic Error

Errorcode: F1 B2 01 26 50 22 4E 20 8C C8
=====

```

4 |

RUNNING Error memory

F1	F2	F3	F4	F5	F6	F7	F8	F9	F10
Read	Clear	Shadow	Quick			adaption		Print	Back

Hodnoty vstrekov benzin volnobeh

INPA - Loader: MS 43.0 Version 1.16


rough

Cylinder	Value
Cylinder 1 [%]	0.703
Cylinder 5 [%]	0.475
Cylinder 3 [%]	1.204
Cylinder 6 [%]	0.377
Cylinder 2 [%]	1.951
Cylinder 4 [%]	0.118


RUNNING Read status

F1	F2	F3	F4	F5	F6	F7	F8	F9	F10
Digital	Analog	PWG/MDK	VANOS	L-probe	A-reg	LU	Select	Print	Back


Hodnoty vstrekov benzin zvysene otacky

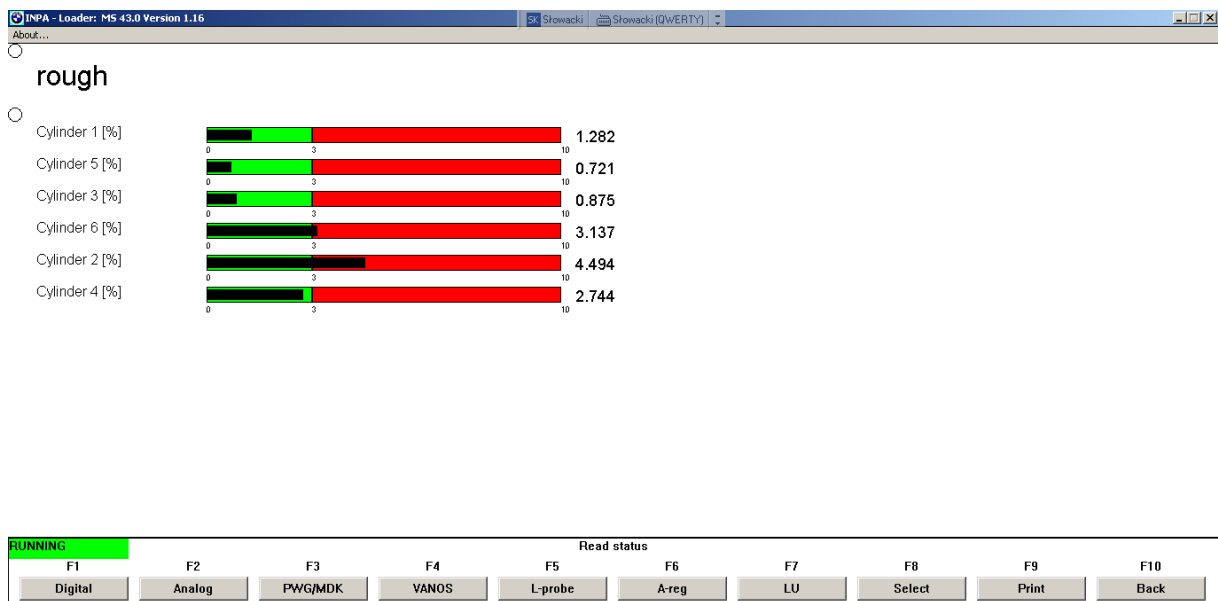


Hodnoty pri plyne aj benzine(vyhrievanie lambdy)

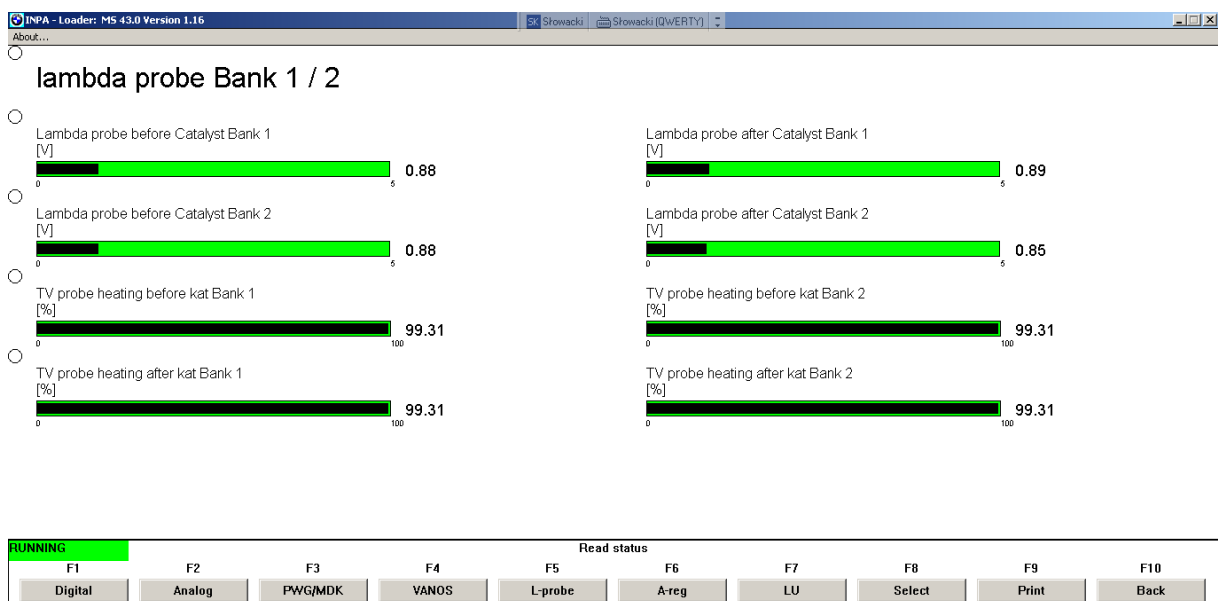

Hodnoty lambda integrator benzin

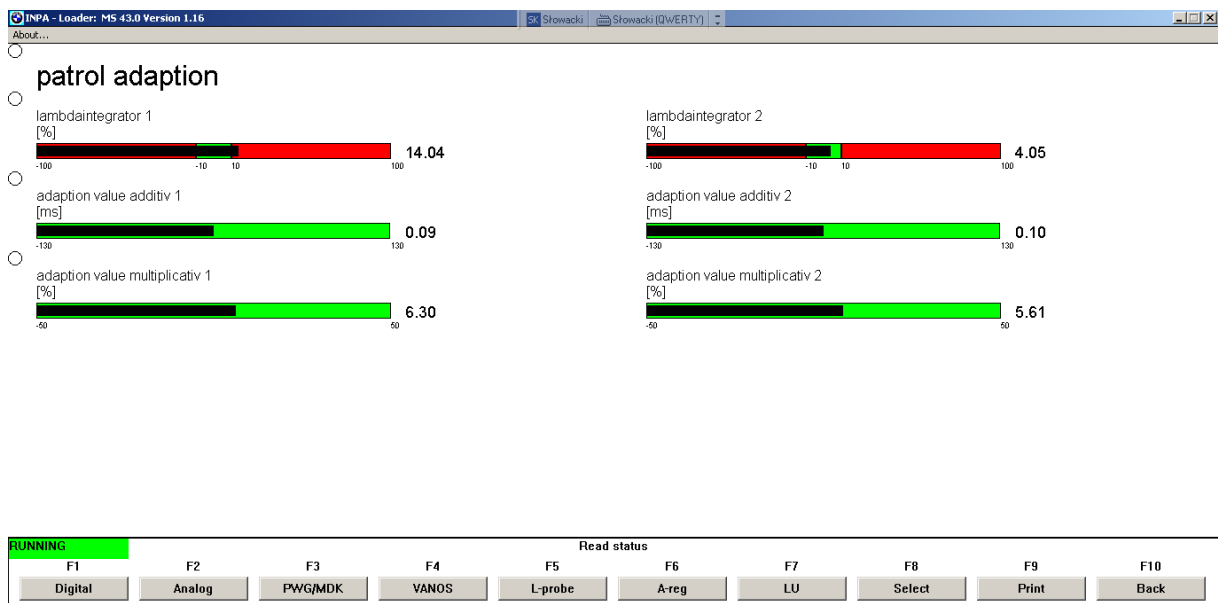

Hodnoty lambda integrator plyn

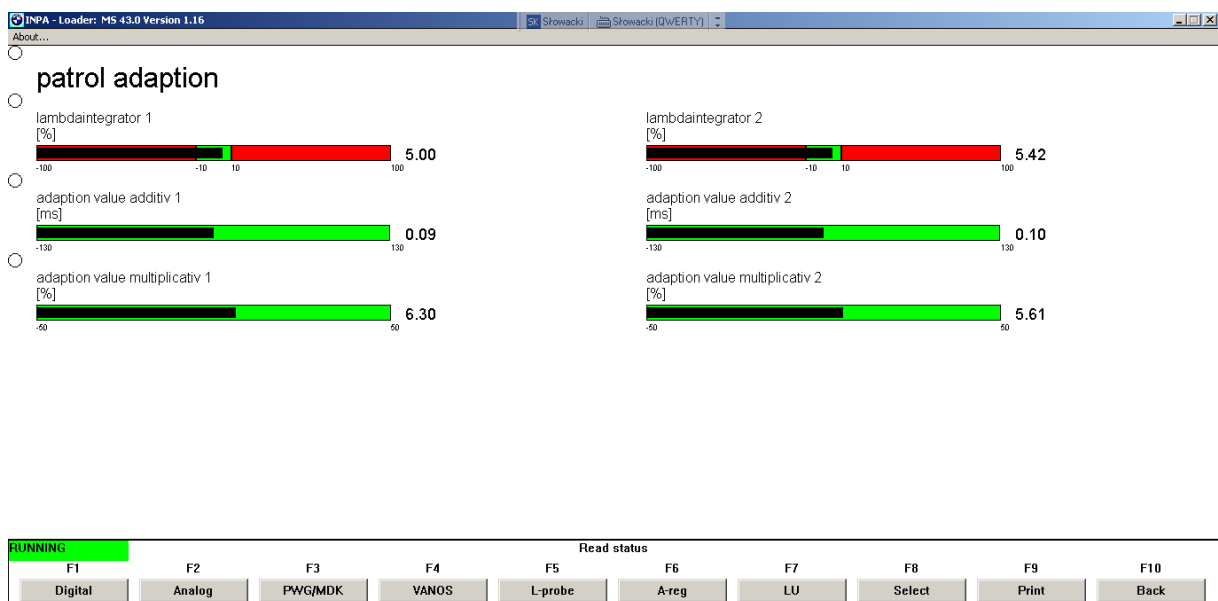

Hodnoty vstrekov plyn

